

Data Sheet



**Brackish Water
Reverse Osmosis (RO) Membranes**

LG BW 400 R G2

Highest rejection membrane equipped with fouling tolerant low dP spacer technology.

Overview


LG Chem's NanoH₂O™ brackish water RO membranes serve various municipal, industrial and commercial applications. Incorporating LG Chem's proprietary Thin Film Nanocomposite (TFN) technology, all LG BWRO membranes deliver reliable and superior performance with intrinsic anti-fouling properties.

LG BW 400 R G2 membrane elements deliver the highest salt rejection and productivity at lower feed pressures with robust membrane chemistry for long-term stable performance. The RO element also incorporates a unique proprietary feed spacer technology for reducing differential pressure. The results are excellent anti-fouling properties and lower cleaning frequency, chemical use, energy consumption, and total cost of plant ownership. Ideal applications include wastewater reuse and feed water sources with high salinity brackish water.

Product Specifications

| Active Membrane Area, ft ² (m ²) | Permeate Flow Rate, GPD (m ³ /d) | Stabilized Salt Rejection, % | Minimum Salt Rejection, % | Feed Spacer, Mil |
|---|---|------------------------------|---------------------------|------------------|
| 400 (37) | 11,500 (43.5) | 99.8 | 99.65 | 34, low dP |

Test Conditions : 2,000 ppm NaCl at 25°C (77°F), 225 psi (15.5 bar), pH 7, Recovery 15%.
Permeate flows for individual elements may vary +/-15%.

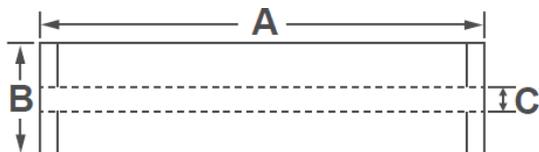

| A, mm (in.) | B, mm (in.) | C, mm (in.) | Weight, kg (lbs.) |
|-------------|-------------|--------------|-------------------|
| 1,016 (40) | 200 (7.9) | 28.6 (1.125) | 16 (35) |

All dimensional information is indicative and for reference purpose only. Please contact LG Chem for detailed technical specification.

Operating Specifications

For more information and operating guidelines, visit www.lgwatersolutions.com

| | |
|---|-------------------------------|
| Max. Applied pressure | 600 psi (41 bar) |
| Max. Chlorine concentration | < 0.1 ppm |
| Max. Operating temperature | 45°C (113°F) |
| pH Range, Continuous (Cleaning) | 2-11 (1-13) |
| Max. Feedwater turbidity | 1.0 NTU |
| Max. Feedwater SDI (15 mins) | 5.0 |
| Max. Feed flow | 75 gpm (17 m ³ /h) |
| Max. Pressure drop (ΔP) for each element | 15 psi (1.0 bar) |

The Membrane Elements performance is expressly conditioned on Buyer's storing, installing, operating, and maintaining Product in accordance with industry-accepted good practices and Seller's written instructions provided in the Seller's Technical Manual, which consists of LG Chem, Ltd [Technical Service Bulletins \("TSB"\)](#) and [Technical Applications Bulletins \("TAB"\)](#) and may be viewed and downloaded at www.lgwatersolutions.com.

The information and data contained herein are deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. LG Chem assumes no liability for results obtained or damages incurred through the application of the information contained herein. Customer is responsible for determining whether the products and information presented herein are appropriate for the customer's use and for ensuring that customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Specifications subject to change without notice. NanoH₂O is the Trademark of The LG Water Solutions or an affiliated company of LG Chem. All rights reserved. © LG Chem, Ltd.